


## BSP FITTINGS

### Sockets BSP

Screwed female parallel thread  
ASA150 lb (68 kg) rating

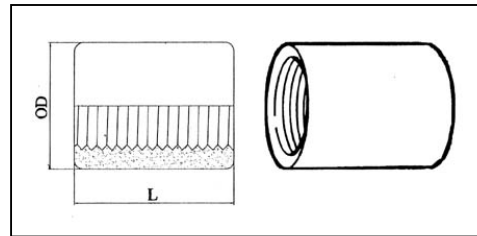

Available in grade **316/316L**

Nominal Bore		Length (L)	Outside Diameter
(mm)	(inches)	(mm)	(OD)
6	1/8	17	14
8	1/4	25	18.5
10	3/8	26	21.5
15	1/2	34	26.5
20	3/4	36	31.8
25	1	43	39.5
32	1 1/4	48	48.5
40	1 1/2	48	54.5
50	2	56	66.3
65	2 1/2	65	82
80	3	71	95
100	4	83	122